

MINIMUM SETBACK FROM FACE OF MAILBOX TO EDGE OF PAVEMENT POSTED (BREAK-AWAY SUPPORTS ONLY) SPEED LIMIT

30 MPH AND LESS


1.50 FEET (18 INCHES)

35 MPH AND GREATER


8.00 FEET

FOR EXISTING ROADWAYS WHERE THE MINIMUM SETBACK REQUIREMENTS CANNOT PHYSICALLY BE MET, CONTACT THE ST JOHNS COUNTY PUBLIC WORKS DEPARTMENT, ENGINEERING DIVISION.

## SWALED ROADWAY SECTIONS



RIGID SUPPORT

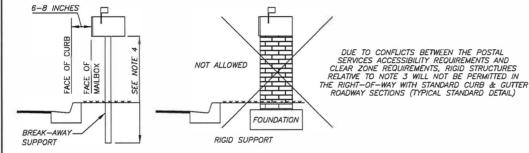


## STANDARD CURB & GUTTER ROADWAY SECTIONS


## GENERAL NOTES:

- 1. THE LOCATION AND CONSTRUCTION OF MAILBOXES SHALL CONFORM TO THE RULES AND REGULATIONS OF THE UNITED STATES POSTAL SERVICE AS MODIFIED BY THE ST. JOHNS COUNTY LAND DEVELOPMENT CODE AND THIS DESIGN STANDARD
- 2. MAILBOX SUPPORT POSTS CONSISTING OF 4 INCH X 4 INCH WOOD SUPPORT POSTS. 2 INCH DIAMETER SCHEDULE 40 STEEL PIPE OR FLANGED CHANNEL MEETING THE MATERIAL REQUIREMENTS OF THE FDOT ROADWAY AND TRAFFIC DESIGN STANDARDS INDEX NO. 532 (LATEST EDITION) WILL NOT REQUIRE A RIGHT-OF-WAY PERMIT AS LONG AS PLACEMENT WITHIN THE RIGHT-OF-WAY MEETS THE STANDARDS SHOWN AT LEFT.
- 3. MASONRY, CONCRETE, BLOCK, BRICK, STONE OR OTHER RIGID FOUNDATION STRUCTURE OR ENCASEMENT EITHER ABOVE OR BELOW THE SHOULDER GROUND-LINE IS CONSIDERED A ROADWAY HAZARD AND IS NOT PERMITTED ON COUNTY ROADS WITHIN THE "CLEAR ZONE" OF ANY COUNTY RIGHT-OF-WAY. THESE TYPE SUPPORT STRUCTURES SHALL BE CONSIDERED A ROADWAY SAFETY HAZARD AND MUST MEET CLEAR ZONE REQUIREMENTS BASED ON CRITERIA CONTAINED IN THE FDOT MANUAL OF UNIFORM STANDARD. USE OF THESE STRUCTURES WITHIN COUNTY RIGHT-OF-WAY REQUIRES A PERMIT AND APPROVAL BY THE PUBLIC WORKS DEPARTMENT PRIOR TO PLACEMENT WITHIN COUNTY RIGHT-OF-WAY.

THESE STANDARDS MUST ALSO APPLY TO PRIVATELY OWNED ROAD RIGHT-OF-WAY FOR THE PROTECTION OF THE HEALTH, SAFETY AND WELFARE OF THE TRAVELING PUBLIC.

- 4. THE BOTTOM OF ALL MAILBOXES SHALL BE SET AT A HEIGHT OF 41 TO 45 INCHES FROM THE GROUND LINE OR AS REQUIRED BY THE POSTAL SERVICE. MAXIMUM EMBEDMENT DEPTH FOR SUPPORT STRUCTURE MEETING ITEM 2 ABOVE SHALL BE 24 INCHES.
- 5. FAILURE TO COMPLY BY THE STANDARDS SHOWN HEREON SHALL RESULT IN IMPLEMENTATION OF CODE ENFORCEMENT PROCEDURES.
- 6. THE APPROACH TO THE MAILBOX MUST BE CLEAR OF ALL OBSTRUCTIONS TO ALLOW SAFE ACCESS FOR DELIVERY. IF U.S. POSTAL SERVICE EMPLOYEES ARE IMPEDED IN REACHING A MAIL RECEPTACLE, THE POSTMASTER MAY WITHDRAW DELIVERY SERVICE.
- 7. THESE STANDARDS APPLY TO NEW CONSTRUCTION AS OF THE EFFECTIVE DATE SHOWN BELOW

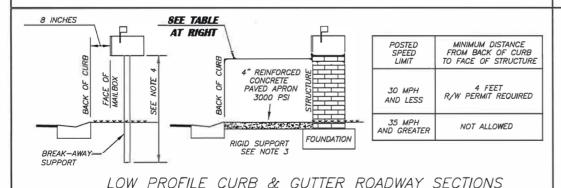

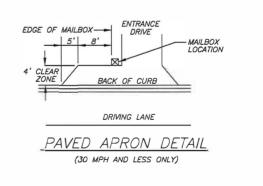

JOHNS COUNTY REVISION EFFECTIVE DATE: DESIGN DETAIL 116 PUBLIC WORKS DEPARTMENT 6/08 DETAIL NO. ENGINEERING DIVISION APPROVED: 4/16/19 MAILBOX PLACEMENT 2740 Industry Center Road 8/21/19 ST AUGUSTINE, FLORIDA 32084 WITHIN ROAD RIGHT-OF-WAY JAY BRAWLEY, P.E. AICP Phone (904) 209-0110 • Fax. (904) 209-0140 COUNTY ENGINEER